
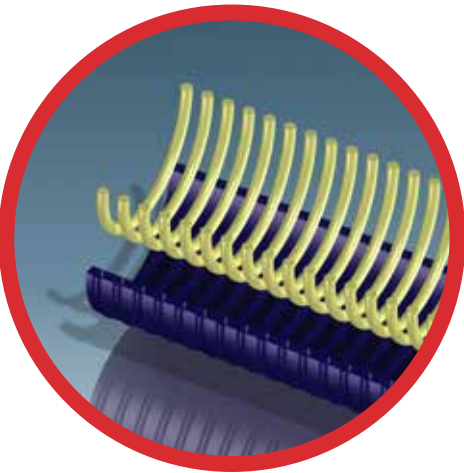


Marte PVC Hose

Blue Oil/Chemical Resistant S&D Hose

General Applications

- For suction and delivery of water, mineral oil, lubricants and crude oils (fuel)
- Service temperature range: -10°C to +60°C

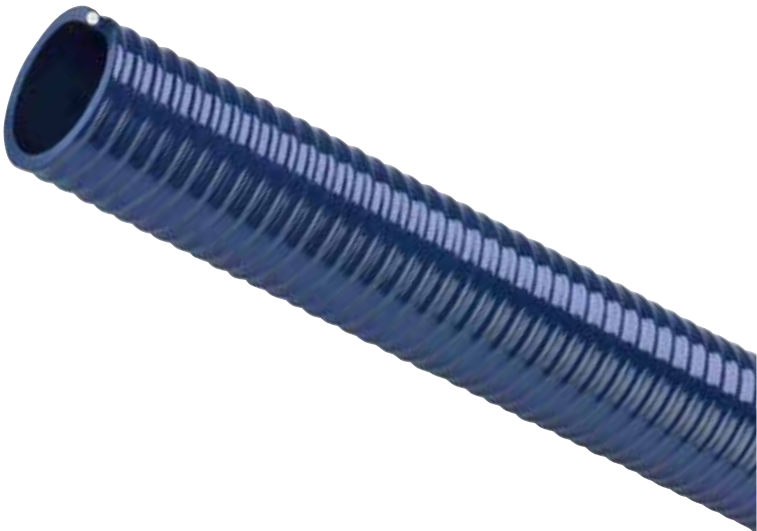

Features & Benefits

- Hose in special antimigration PVC compound reinforced with an antishock rigid PVC spiral
- Resistant to abrasion, ageing, atmospheric agents and ozone
- Colour: Blue
- Type: PVC Suction - Oil/Chemical S&D Hose

Part Number	ID		Working Pressure		Burst Pressure		Min Bend Radius at (mm)	Vacuum Rating (mh ₂ O)	Standard Length (m)	Weight (kg/m)
	(in)	(mm)	(psi)	(bar)	(psi)	(bar)				
28-4019	3/4	19	116	8	348	24	140	10	50	0.42
28-4025	1	25	116	8	348	24	170	10	50	0.55
28-4032	1-1/4	32	116	8	348	24	205	10	50	0.70
28-4038	1-1/2	38	102	7	305	21	235	10	50	0.81
28-4051	2	51	87	6	261	18	300	10	50	1.15
28-4064	2-1/2	64	87	6	261	18	370	10	50	1.69
28-4076	3	76	73	5	218	15	440	10	50	2.06
28-4102	4	102	58	4	174	12	600	9	30	3.37

Tigertail Sanitation Hose

Portable Loo Sewerage Suction Hose

General Applications

- Suction of liquids in sanitary and sewer applications, also used in airport services


Features and Benefits

- All polyethylene construction (LDPE) makes the Tigertail hose corrosion resistant and extremely flexible, even at sub zero temperatures.
- Its strong profile construction offers a much longer durability with an incredibly low weight compared to rubber construction.
- Service temperature range: -40°C to +60°C
- Crushproof – Will spring back to original shape after being crushed; it will not kink
- Smooth Bore – Smooth interior wall increases pump efficiency and decreases the blocking risk
- Wear Resistant – Cap resists wear and deterioration even in really tough environments
- Leak Proof Cuffs (35-24051C)



Construction

- Polyethylene, yellow-black, special colours upon request
- Single Length: 15 or 20m
- Crush recoverable, good chemical resistance, excellent vacuum resistance, rot-proved
- End finishing: Tight welded cuffs on both ends for long-lasting leak proofing (35-24051C)
- Single cuffs are also available for replacement

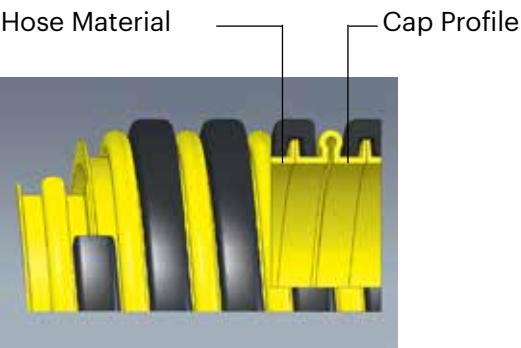

Part Number	ID		Material Thickness (mm)	Min Bend Radius (mm)	Vacuum Rating (mh ₂ O)
	(in)	(mm)			
35-24051 x 15m	2	51	1.4	85	9.5

- Other lengths available to order