


# Philmac

## Tape-lock<sup>+</sup>.

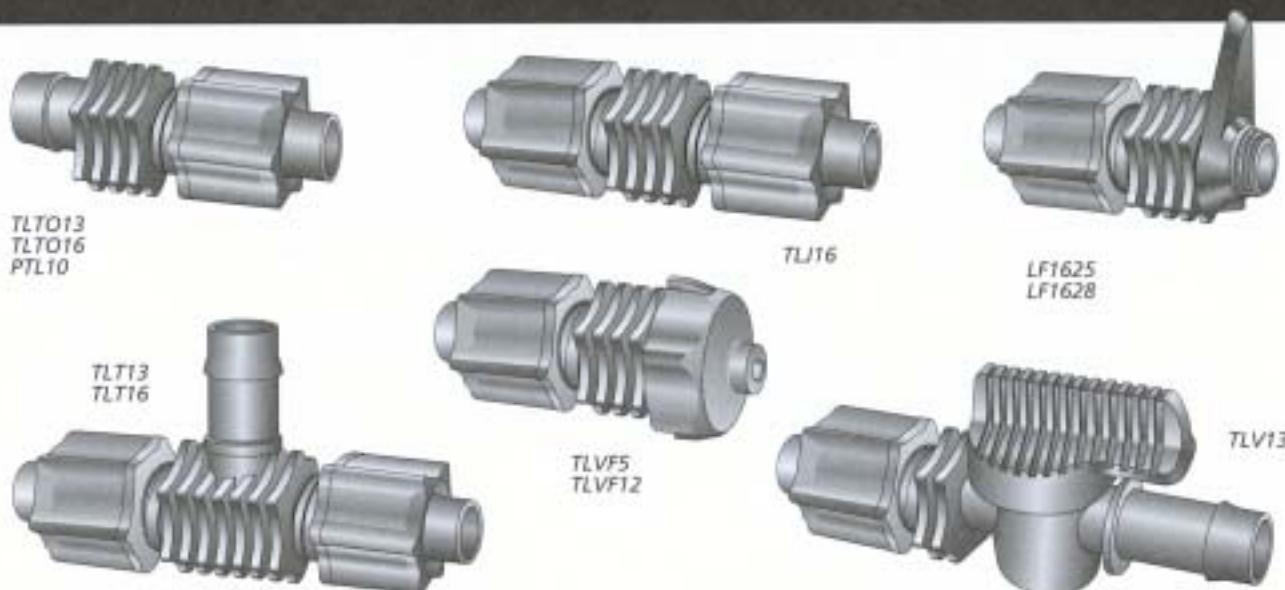

### Heavy duty fittings and valves for drip tube connections

A comprehensive range of heavy duty fittings and valves which provide a positive and quick method of connecting most brands of 16mm ID (Nominal) drip tube and tape products.

#### ■ Performance features

- Heavy duty lock nut (easy on the fingers) – comfortable to work with.
- Acme square thread for quick engagement with drip tube, locking it into position.
- Chamfered interface has been designed between the locking nut and the barb to provide the best possible sealing action.

#### ■ Operation

The drip tube slides over the leading ramp of the barb to butt against the internal wall. A half turn of the lock nut "seals" the tube against the face of the barb.

#### ■ Application

- For use with compatible drip tube in vegetable row crops, vineyards and general horticulture.
- Above ground and sub-surface connections.
- Connections from lay flat hose, PVC and PE pipe work systems.

#### ■ Installation

See overleaf for details.

# INSTALLATION

## Tape assembly to fitting:



1. Ensure lock nuts are screwed back against the fitting shoulder. Slide drip tape over barb and push home to butt against the internal wall.




2. Hold the body and half turn locking nuts in a clockwise direction. Nip tight with a spanner, only if necessary.

## Connection to lay flat hose:



1. Punch hole using oval eye punch.



2. Loosen the tear drop to provide 5mm gap approx.



3. Insert tear drop through punched hole in lay flat hose. (NB: for oversized or stretched holes use product No. LF1628).



4. Hold wing of tear drop through lay flat and turn fitting clockwise. Nip tight with 3/8" allen key.

## Connecting to PVC or PE pipes:



1. Drill hole to recommended size.





2. Place 'Top Hat' Grommet firmly in hole with flange facing out.



3. Insert and locate take-off firmly against flange of Grommet.

\*Refer to Grommet Specification Sheet No. W55-017H.

## Connecting PE pipe to tape/drip tube:

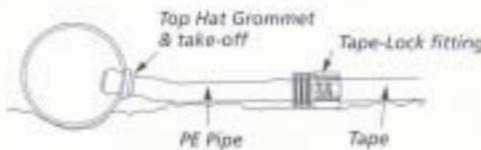
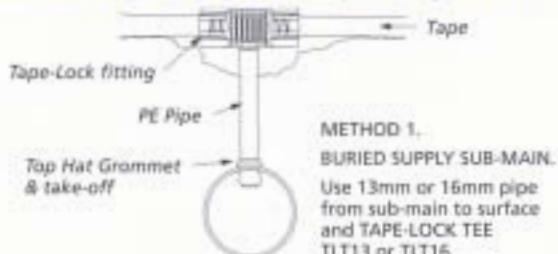


- METHOD 2.  
POLYETHYLENE PIPE BETWEEN SUB-MAIN AND DRIP TAPE.  
Allow for desired length of pipe between sub-main and drip tape, use TAPE-LOCK TLTO13 or TLTO16 to join.

## Tape-Lock+ Auto Flushing Valves

PRODUCT CODE	CAP COLOUR	NOMINAL SEAL RATE
TLVF5	RED	5kPa
TLVF12	BLACK	12kPa

Manual purging of individual lines (if required) is done by pressing the "valve tickler". The static line pressure must be minimum 36kPa (approx. 5 psi) for manual purging.

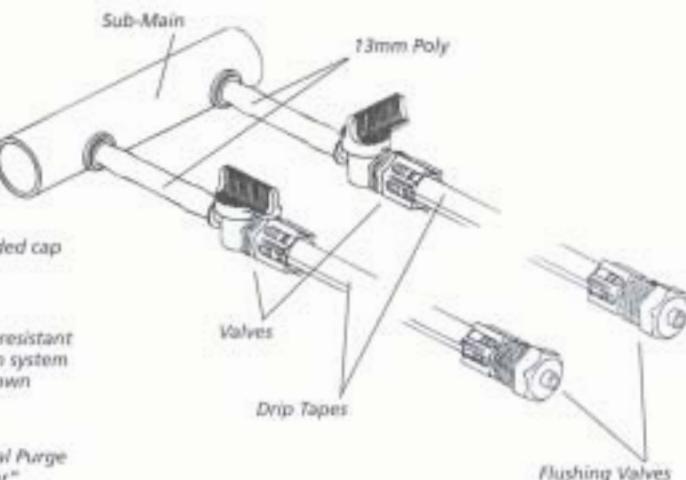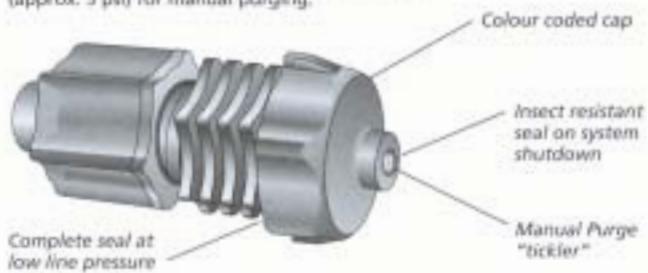

**RECOMMENDED USE:**  
Products described above are designed and manufactured for micro irrigation use and therefore have a maximum recommended operating pressure.  
The products must be used with suitable filtration (where applicable) to avoid blockage or damage to working components.

Please note that the information, opinions, recommendations and advice given on this specification sheet are supplied only to provide an improved understanding of the technical aspects of Philmac products. So far as the law allows, Philmac Pty. Ltd. will not accept liability in respect of any loss or damage of any kind claimed to arise as a result of reliance upon any information contained on this specification sheet. Please refer to our Terms and Conditions of Supply of Goods.

W551628-01

**Philmac®**

Philmac Pty Ltd 53-59 Deeds Road,  
North Plympton, S.A. 5037, Australia  
Telephone (08) 8300 9200 Facsimile (08) 8300 9390  
Web: <http://www.philmac.com.au>

an **Etex** GROUP company