
4*6.5 Tube Head loss Curve

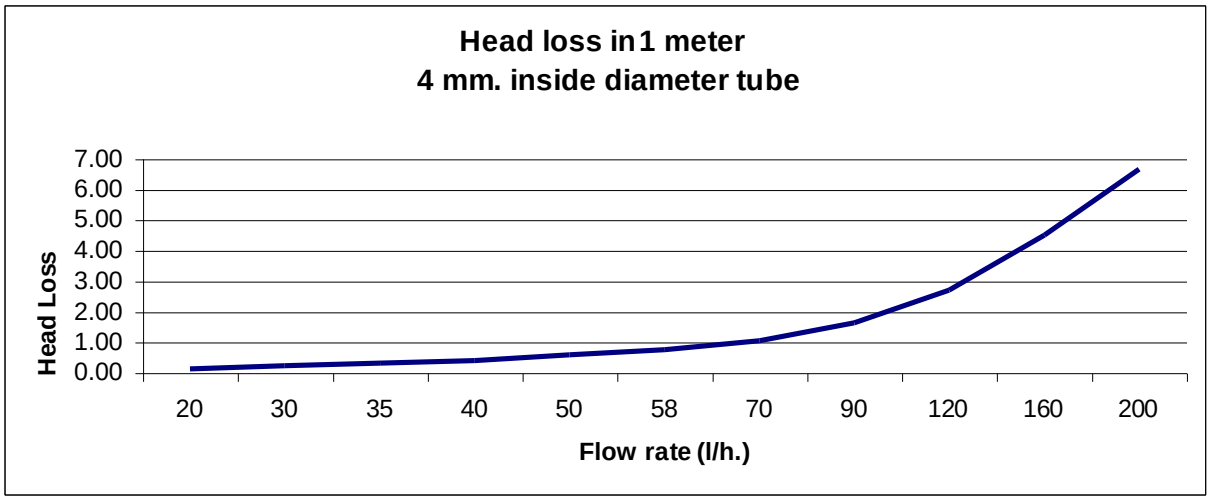

* It is to be noted that the pressure head loss produced due to installation of 'Stripnet' above distributor pipe must be calculated in advance.

The following table displays pressure head loss per 1 meter of pipe length (data required to assist in the selection of suitable micro-tube per requirements). The flow rates appearing are the most acceptable in the sprinklers we market:

SPE 6*8, inside diameter: 5.5mm
SPE 9*12, inside diameter: 8.7mm
PE 16/4, inside diameter: 13mm

	Q (l/h)										
Inside diameter	160	180	235	390	420	450	460	520	600	620	870
5.5	0.99	1.22	1.94	4.74	5.40	6.10	6.34	7.86	10.12	10.72	19.45
8.7	0.11	0.14	0.22	0.53	0.61	0.69	0.71	0.89	1.14	1.21	2.19
13	0.02	0.02	0.03	0.08	0.09	0.10	0.11	0.13	0.17	0.18	0.32