


EUROPA CHECK VALVE 100

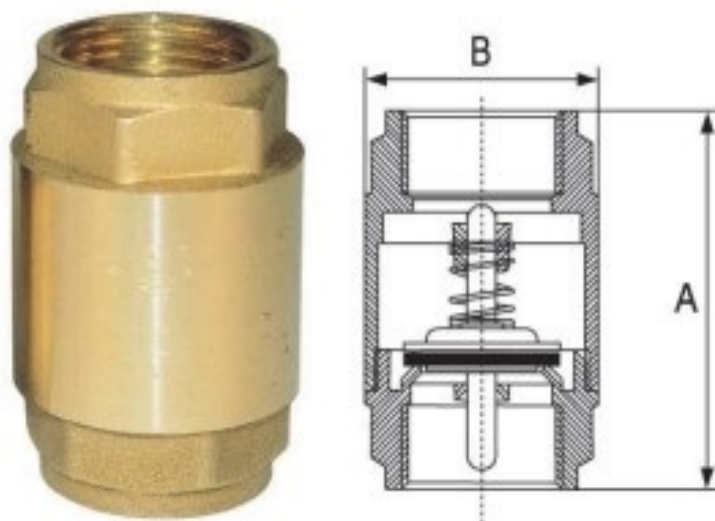

Technical Features: Suitable for industrial, pneumatic, and hydraulic installations, ideal for hot/cold water, different oils and compressed air. It can be fitted in horizontal, vertical or oblique position. Minimum and maximum working temperature:
 Air: -20°C, 110°C
 Water : 0°C, 90°C.
 Gas: -20°C, 60°C.
 Available: in all sizes from 3/8" up to 4".
 Thread: ISO228 - DIN259 - BS2779.

MATERIALS

PART	MATERIAL
Body	Brass CW 617N
Internal Seat	Stainless Steel Plate AISI 304 fitted with NBR 60 SH/A, Cover Plate and Rod in Brass CW 614N
Spring	Stainless Steel AISI 302

TABLE OF DIMENSIONS

SIZE	A	B	kg/cm ² -bar	psi	Packing Each Box	Master Carton
3/8"	55	34.5	25	360	10	170
1/2"	58.5	34.5	25	360	10	170
3/4"	65	41.5	25	360	8	120
1"	74.5	48	25	360	6	78
1-1/4"	83	60.5	18	260	4	48
1-1/2"	93	71	18	260	4	36
2"	101	87	18	260	2	24
2 1/2"	122	120	12	170	1	12
3"	141.5	140.5	12	170	1	8
4"	158.5	172.5	12	170	1	5